Limbayong

Deepwater oil and gas development · Blocks G / J / R · Offshore Sabah

Working Draft v0.3 — Parts 1, 3 and 5, with ledger, source register and build status

Supersedes v0.1 and v0.2. Adds the geology that the earlier revisions lacked.

Document ID	LIM-SFDP-v0.3
Revision	0.3 — adds Part 5, The Earth
Date	19 October 2026
Prepared by	HERMES (arifOS). Not attributed to any person.
Status	Working draft — three Parts of twelve. Not a review pack.
Scope	Parts 1, 3 and 5; Appendices B, E, F, G
Classification	Independent reconstruction from public sources

NOT A PETRONAS DOCUMENT

This is not a PETRONAS or PETRONAS Carigali document, and was not produced with, reviewed by, or endorsed by either company, MISC, or any contractor. It contains no internal data. No PETRONAS logo, branding or document numbering is used or implied.

Contents

Decision frame 1
Document control 2
Response to the audit 3
1 Basis and reconciliation 4
3 Production 7
5 The Earth 11
Appendix B — Assumptions ledger 17
Appendix E — Source register 18
Appendix F — Build status 19
Appendix G — Figure QA gate 20

Parts 2, 4 and 6–12 are not written. Appendix F states what each is waiting for. The pack is deliberately incomplete rather than uniformly thin.

Decision frame

For a reader with two minutes. Every figure is sourced in Appendix B and E.

> **On the vessel it actually bought, Limbayong produces 25,000 barrels a day — not 40,000.**

Every planning figure in this programme that assumed 40,000 bopd, 75,000 barrels a day of water injection, and 600,000 barrels of storage was reading a *2020 FPSO tender that was never awarded*. The vessel that was bought — the **Excalibur**, IMO 9417103, ex-**Sevan Hummingbird**, built 2007 — is published by its owner at **25,000 bopd, 30,000 barrels of total liquids, 20,000 barrels a day of water injection, and 270,000 barrels of working storage**.

What the resource gives

139.5 MMbbl at P50, from a declared bracket of 347–398 MMbbl oil in place and 35–40 per cent recovery. DERIVED

What the vessel allows

25,000 bopd. At that rate the resource depletes in **15.3 years**, P90–P10 range 14.5–16.1. VERIFIED

What the gap is

15,000 bopd of capacity that either exists after MMHE conversion, or does not. No public source says which. OPEN

What the ground adds. The structure is 30 km long and 2.5 km wide, and the operator's own paper says it is compartmentalised enough to defeat well drainage and pressure maintenance. Gas is the phase that leaks in this basin. Which means the number to argue about is not the vessel's 40,000 bopd — it is how many tanks there are, and how many wells it takes to drain them. Part 5.

Three questions a chairman can put tomorrow

1. **What is the post-conversion topsides specification, in writing?** Not the 2020 tender — the as-built vessel. Every production, injection and storage number in this document changes with the answer.
2. **Is the development phased around a 25,000 bopd hull, or does it need a second hub?** At 25,000 bopd this is a 15-year asset. At 40,000 it would be a 9.6-year asset that cannot be held. Those are different projects with different economics.
3. **What is the gas route?** Limbayong is an oil accumulation **and** a non-associated gas field — Limbayong-1 found gas in 2002, Limbayong-2 found oil in 2013. The vessel's gas handling capacity is not published at all. VERIFIED

What this pack does not answer

No net present value, no internal rate of return, no capital cost, no schedule, no economic limit (L-40, OPEN). Those need a fiscal engine built on Malaysian PSC terms and a term sheet. Neither is public, and three ad-hoc fiscal models in this programme produced three different answers from the same inputs. A fourth would repeat the defect rather than resolve it.

What this pack does is fix the **physical** basis, so that the economics — when they exist — are computed on the right field.

Document control

Revision block

Rev	Date	Change
0.1	19 Oct 2026	First issue. Parts 1 and 3. Nine pages.
0.2	19 Oct 2026	Rebuilt on the as-built vessel basis after independent audit. Vessel identity resolved; facility basis split into four spec sets; corner-product cases replaced by a correlated Monte Carlo; VRR corrected; gas ratio relabelled; water depth reclassified; figure QA automated.
0.3	19 Oct 2026	Adds Part 5, The Earth: plate framework, real bathymetry, tectonostratigraphy, trap geometry, charge and leakage, geomechanics, and five earth-derived findings. Water depth measured independently at 994 m. Five new figures.

What changed in this revision, and why

Item	Change
Vessel identity	Excalibur resolved to IMO 9417103 = Sevan Hummingbird = Hummingbird Spirit. v0.1 treated it as an unnamed hull.
Oil capacity	30,000 bopd in v0.1 → **25,000 bopd** as-built, with 30,000 bpd as total liquids.
Water injection	75,000 bwpd in v0.1 → **20,000 bwpd**. The 75,000 was a tender spec.
Storage	300,000 bbl “versus spec” → **300,000 design / 270,000 working**. Not a discrepancy.
Cases	Low/Mid/High corner products → correlated Monte Carlo reporting P90/P50/P10.
Gas	5,640 scf/bbl presented as a GOR → relabelled a **ratio of totals**, withdrawn from gas-train sizing.
Water depth	900–1,400 m, tagged OPEN → **900–1,200 m**, two sources; upper bound withdrawn.
Cost anchors	Absent → subsea award bands added as L-38 and L-39.
Status	“Review pack” → **working draft, three Parts of twelve**.
Geology	Absent → **Part 5 added**: plate framework, real DEM, stratigraphy, trap, charge, geomechanics.
Water depth	900–1,200 m reported → **994 m measured** from DEM, consistent with the reports.

Reading guide — five tags

Tag	Test it must pass
VERIFIED	Two or more independent sources, or one primary document (a filing, a statute, a contract). Independence is counted per row in Appendix B.
REPORTED	One source only, URL given. Carries the single-source flag; a critical-path number in this class is a risk, not a fact.
DERIVED	Computed here from other ledger rows. The formula is in the row, so the arithmetic can be repeated without trusting the author.
ASSUMED	A judgement, not a measurement. Owner and reason stated. Can be challenged; cannot be verified.
OPEN	The input does not exist in the public record. Marked, never guessed. Appears as a red banner where it changes a conclusion.

Two rules this document is built on. First, no number may exist only in prose — every figure traces to a row in Appendix B. Second, no conflict is resolved silently: where two sources disagree, both are printed and the disagreement is given an ID.

Data classification

All information derives from public sources: one Bursa Malaysia filing, trade press, an operator-side project description, a non-commercial resource tracker, and public-domain geospatial data. No PETRONAS, PETRONAS Carigali, MISC or contractor confidential material has been used, requested or received. A reader with access to operator data should expect this document to differ from it, and should prefer the operator’s data.

Response to the audit

An independent audit scored the previous revision at 2.6/10 and named three stopping errors. Each finding was re-tested here against primary sources rather than accepted or rejected as a block. Ten material findings: nine confirmed, one corrected.

No.	Finding	Independent re-test	Disposition
1	Excalibur is the ex-Sevan Hummingbird	Offshore Magazine, 4 Aug 2022: “renamed … previously known as the Sevan Hummingbird”. Bursa filing, 20 Aug 2026, gives IMO 9417103.	**Confirmed.** Entity key added (L-01). Failure to resolve it was a provenance defect, not an information gap.
2	Vessel produces 25,000 bopd, not 30,000	Offshore Magazine 2022: “can produce about 25,000 bbl/d, 270,000 bbl storage”. Sevan DWT vessel page matches.	**Confirmed.** Adopted as the governing ceiling (L-05).
3	75,000 bwpd is the 2020 tender, not this vessel	OE Digital, 23 Feb 2021, quoting World Energy Reports: 40,000 b/d oil, 90 mmcf/d gas, 75,000 b/d water, 600,000 bbl storage.	**Confirmed.** Reclassified as L-12 and removed from all vessel arithmetic.
4	The tender gas train was “ 150 MMscfd”	The same source states **90 mmcf/d**. The 150 was back-computed from the 5,640 scf/bbl ratio the audit simultaneously criticised.	**Corrected.** Conclusion holds — tender spec is not the vessel — but the number is 90 MMscfd (L-11), not 150.
5	VRR was defined oil-only	Surveillance definitions include produced water and free gas. At 25,000 bopd and Bo 1.30, oil voidage is 32,500 rb/d against 20,000 bwpd injection.	**Confirmed.** VRR 0.62 on the oil term alone — underreplacement, not over-injection (§3.6).
6	Low/Mid/High are corner products, not a PRMS range	347×0.35 and 398×0.40 pair extremes of two back-calculated routes; neither has probability meaning.	**Confirmed.** Replaced by a correlated Monte Carlo reporting P90/P50/P10 (§3.2).
7	5,640 scf/bbl is a ratio of totals, not a GOR	790.9 bcf ÷ 139 MMbbl = 5,640. Mixes free and solution gas.	**Confirmed.** Relabelled (L-37); withdrawn from all gas-train and voidage reasoning (§3.5).
8	Water depth is reported, not unknown	Offshore Technology, 15 Jun 2021: “water depths between 900m and 1,200m”. Repeated by 2026 trade press.	**Confirmed.** Now VERIFIED at 900–1,200 m (L-16). The 1,400 m bound is withdrawn — no source.
9	Cost anchors were unused	TechnipFMC “substantial” = US$250–500M (2021); “significant” = US$75–250M (2026).	**Confirmed.** Added as L-38 and L-39.
10	Figure defects shipped	The previous revision already carried a scale bar, graticule, north arrow and CRS note; the claim was made from description, not from bytes.	**Addressed by measurement.** A deterministic bounding-box gate now runs on every figure (Appendix G): zero overflow, zero overlap across five figures.

Table 0.1 — Audit findings, re-tested. The audit was treated as a claim set, not as a verdict.

On the system scores. The audit’s component grades — three fiscal engines, tool-surface bloat, self-grading — are accepted and recorded in Appendix F. They are not repaired inside a document. They are repaired in code, in the order the audit proposes.


1 Basis and reconciliation

1.1 Basis of design

The public record on Limbayong is thin in a specific pattern: enough to know a development exists, not enough to know whether it works. This pack separates three things usually blended together.

Established. The field lies in Block G, about 120 km offshore Sabah, in 900–1,200 m of water; it is an oil accumulation with non-associated gas; development is ten subsea wells tied back to a floating production unit; FID was taken on 28 August 2026; working interest is 100 per cent PETRONAS Carigali. VERIFIED

Inferred. That a structure described by its own operator as “industry top decile reservoir complexity” with lateral compartmentalisation cannot deliver a uniform recovery factor along its 30 km length. Sound, but an inference. DERIVED

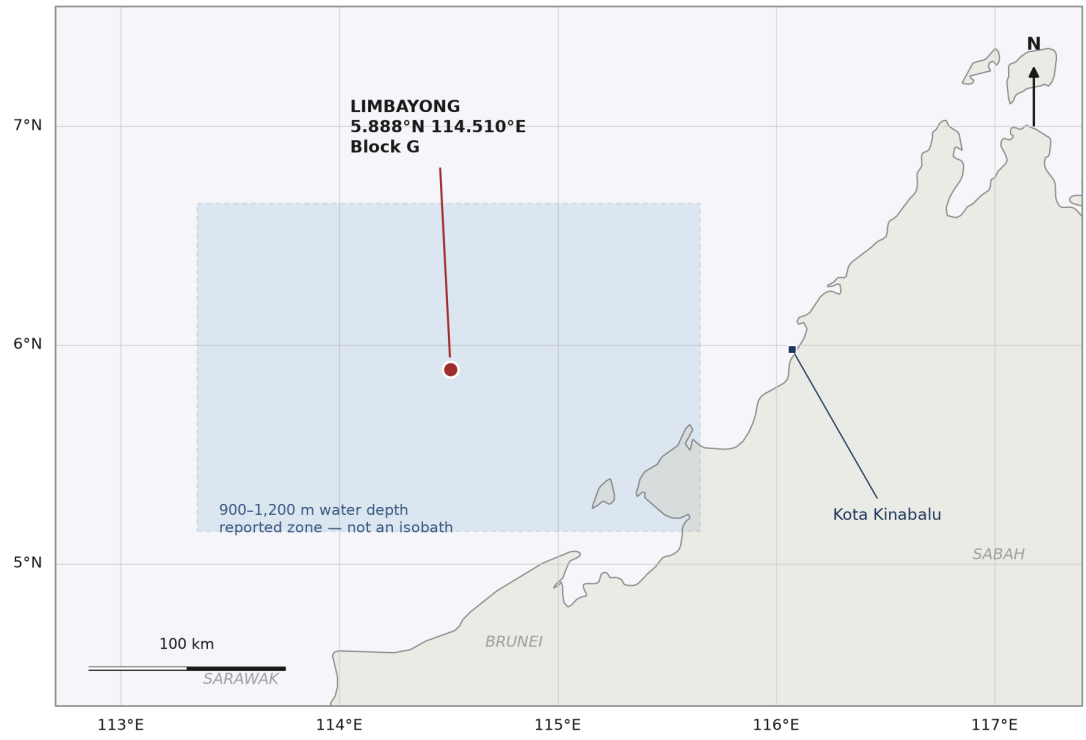

WGS84 / PlateCarree. Base: Natural Earth 1:10m coastline (public domain). Position L-17; depth L-16. No public block polygon or isobath is used, so a point and a schematic zone are shown. GEBCO ba

Figure 0 — Location. Limbayong lies in Block G, about 120 km offshore Sabah, in 900–1,200 m of water. The shaded zone is schematic and is not an isobath; the block outline is not public, so a point is shown rather than a polygon. Base map: Natural Earth 1:10m. Position L-17; depth L-16. VERIFIED

Absent. No public seismic, well log, core, PVT sample, production test, cost estimate, gas sales agreement or fiscal term sheet. Every subsurface volume here is a screening range, not a reserves estimate. Nothing in this pack uses the word “reserves”.

1.2 Entity resolution — which vessel

This is the failure that mattered most in the previous revision, and it is worth showing how cheap it was to avoid.

Name	Period	IMO	Owner and note
Sevan Hummingbird	2007–2022	9417103	Teekay. Cylindrical SSR300 hull, built 2007, commissioned 2008.
Hummingbird Spirit	2008–2022	9417103	Operating name under Teekay — the same hull, used interchangeably.
Excalibur	2022–2026	9417103	Renamed by Ping Petroleum (DNeX), 4 Aug 2022, for the Avalon development.
Excalibur	2026–	9417103	Sold to MISC for US$35.0M on 20 Aug 2026. In lay-up at Port of Nigg; delivery at MMHE Pasir Gudang.

Table 1.1 — One hull, four names. The IMO number is the only stable key. Sources S-01, S-02, S-05; ledger L-01 to L-04.

A single IMO check would have caught this. It is the cheapest control in the programme and it was absent. The practical consequence: the “270,000 versus 300,000 barrels” discrepancy flagged in the previous revision is not

a discrepancy at all. 300,000 is the **design capacity** in the Bursa filing; 270,000 is the **working storage** in the owner's factsheet. Same hull, two definitions.

1.3 Facility basis — four spec sets that were conflated

Topsides capacity is not a property of a hull class. Three Sevan 300 hulls carry three different process plants, and the Limbayong tender specified a fourth. This is the table the pack should have started with.

Unit (Sevan 300 hull)	Oil bopd	Liquids bpd	Water inj. bwpd	Gas	Status for Limbayong
Hummingbird Spirit = Excalibur	25,000	30,000	20,000	not published	**The vessel bought.** As-built, 2007, IMO 9417103.
Voyageur Spirit at Shelley	20,000	50,000	—	25 MMscfd	Not this vessel. Shows how far topsides vary within one hull class.
Voyageur Spirit at Huntington	30,000	60,000	48,000	38 MMscfd	Not this vessel. The 30,000 figure that leaked into the previous revision.
Limbayong FPSO tender, 2020	40,000	60,000	75,000	90 MMscfd	**Cancelled, never awarded.** Source of the 40,000 / 75,000 / 600,000 numbers.

Table 1.2 — Four specification sets. Only the first belongs to the vessel. Sources S-03, S-06; ledger L-05 to L-13.

> **OPEN — L-42 — post-conversion topsides.** MISC and MMHE have not published what work will be done to Excalibur for Limbayong, or what capacity it will have afterwards. Every number in Part 3 is therefore conditional on a specification that does not exist in public. This is the largest gap in the pack, and analysis cannot close it — only a disclosure can.

1.4 One number set

Every figure in Parts 1 and 3 resolves to a row in Appendix B. No number may exist only in prose.

Parameter	Vessel / field value	Class	Row
Vessel identity	IMO 9417103	VERIFIED	L-01
Oil production capacity — as-built	25,000 bopd	VERIFIED	L-05
Total liquids — as-built	30,000 bpd	REPORTED	L-06
Water injection — as-built	20,000 bwpd	REPORTED	L-07
Storage — design / working	300,000 / 270,000 bbl	VERIFIED	L-03, L-04
Gas handling capacity	not published	OPEN	L-09
Oil recoverable — public	139 MMbbl	REPORTED	L-14
Gas recoverable — public	790.9 bcf	REPORTED	L-15
Water depth	900–1,200 m	VERIFIED	L-16
Recoverable P90 / P50 / P10	132.6 / 139.5 / 146.8 MMbbl	DERIVED	L-28–30
Life at 25,000 bopd, P90/P50/P10	14.5 / 15.3 / 16.1 yr	DERIVED	L-31–33
Economic limit	not stated	OPEN	L-40
Post-conversion topsides	not published	OPEN	L-42

Table 1.3 — The one number set. Full ledger with formulas, sources and independence counts in Appendix B.

1.5 Conflict register

Nine disagreements were identified across the programme. The previous revision carried seven. Three are now closed, two changed status because of the audit, and four remain open.

ID	Conflict	Values in the record	Status	Resolution, or next action
C-01	Total development capex	2.83 / 2.90 / 3.17 / 4.05 bn	OPEN	Part 8. Independent cost build; retire three WBS variants.
C-02	Throughput: nameplate or forecast	40,000 vs 25,000 bopd; 150 vs 90 MMscfd	CLOSED	Nameplate belongs to a cancelled tender. Vessel ceiling is 25,000 bopd.
C-03	Oil in place	517 MMbbl STOIIP vs 347–398 MMbbl screening	OPEN	Part 5. Different definitions; one basis must be adopted.
C-04	Net present value at one price	4 values at one price	OPEN	Part 9. Single fiscal engine; no NPV quoted in this pack.
C-05	First oil	2029 vs Q4 2030	OPEN	Part 8. Integrated schedule against comparables.
C-06	Decline, and the “44%” figure	9.6 yr stated; 44% stated	CLOSED	9.6 yr is 139 ÷ 40,000 — tender arithmetic, not subsurface. “44%” reproduces nowhere; withdrawn (§3.4).
C-07	Water injection duty	20,000 vs 75,000 bwpd	CLOSED	20,000 is the vessel; 75,000 is the cancelled tender.
C-08	Gas handling capacity	90 MMscfd tender vs 150 asserted vs none published	OPEN	L-09. No public figure exists for this hull.
C-09	Vessel identity	unnamed hull vs Hummingbird Spirit	CLOSED	IMO 9417103. Resolved by entity key (Table 1.1).

Table 1.4 — Conflict register. Closed items carry an explicit resolution; open items carry an owning Part. Nothing closes silently.

Why C-02 and C-07 closed rather than narrowed. They were never disagreements about the field. They were a category error: a tender specification read as a vessel specification. Once the four spec sets sit side by side (Table 1.2), there is nothing to reconcile — only a shortfall to report, which is a finding rather than a conflict.

1.6 What Part 1 establishes and what it does not

Established

- The vessel is identified by IMO number, not by name: one hull, four names, and a documented rename in 2022.
- Its as-built capacity is 25,000 bopd — 37.5 per cent below the figure the development case has been described against.
- Four specification sets exist in the public record. Only one of them belongs to the vessel.
- Three conflicts closed on definitional grounds; four remain open, each with an owning Part.
- Every number in this Part traces to a ledger row, and every ledger row states its formula or its source.

Not established

- Post-conversion capacity (L-42). The single number that governs everything downstream.
- Whether MISC or PETRONAS has confirmed the Limbayong link. Currently single-sourced trade reporting.
- Which oil-in-place basis is correct: 517 MMbbl STOIIP, or the 347–398 MMbbl screening bracket.
- Anything that costs money. No capital, opex, schedule or fiscal term in this Part is primary.
- Whether the vessel’s gas handling exists at all, or is being added.

A reader who takes one thing from Part 1 should take the entity key. Three of the four closed conflicts were the same failure wearing different clothes: a number that belonged to a machine, a tender, or a name, used as if it belonged to the field.

3 Production

3.1 Case construction — why the old cases were wrong

The previous revision ran three cases: 347 × 0.35, 372.5 × 0.375 and 398 × 0.40. Each looked defensible. Together they were not a range.

What was wrong

- The low case paired the lowest oil in place with the lowest recovery factor; the high case paired the highest with the highest. Those are **corner products** — the two least likely combinations in any joint distribution.
- Neither corner has a probability meaning, so neither is a P90 or a P10.
- The bracket was back-calculated from the same public 139 MMbbl, so the spread measured arithmetic, not geology.

What replaced it

- One route: recoverable = oil in place × recovery factor.
- Both inputs sampled jointly with a positive rank correlation (ρ = +0.60), because better rock raises both — the dependency the corner cases ignored.
- 20,000 draws, fixed seed, bit-reproducible.
- Reported as P90/P50/P10 of the **output**, with the public 139 used only as a calibration check that P50 lands on it.

The result is deliberately narrow — P90 132.6, P50 139.5, P10 146.8 MMbbl. That narrowness is stated rather than disguised: the Monte Carlo propagates the declared bracket, it does not estimate the field. Without a competent persons report the true uncertainty is not measurable, and the pack says so instead of manufacturing a wider spread.

3.2 Distributions and reproducibility

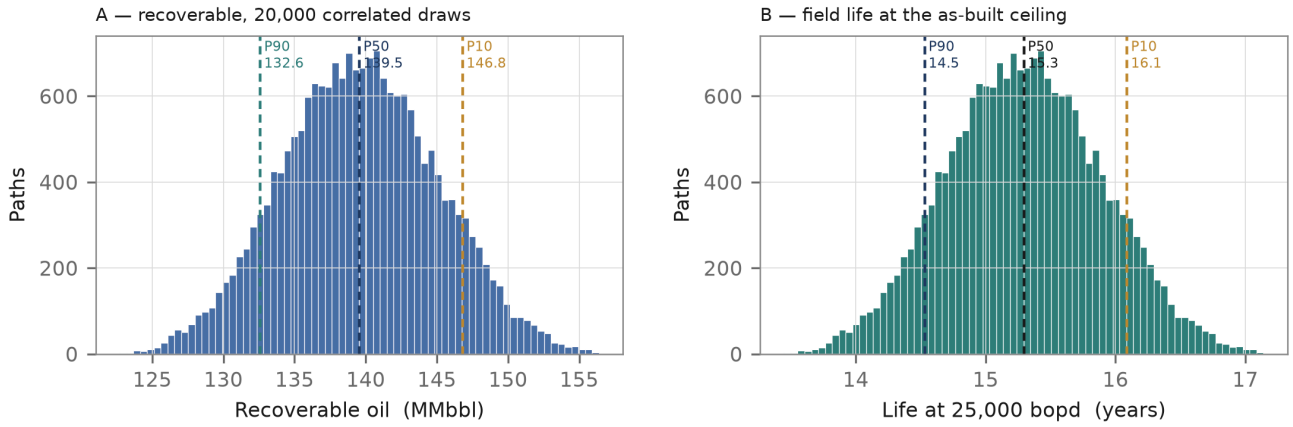



Figure 3 — Monte Carlo output, 20,000 correlated draws, fixed seed. **A:** recoverable oil. **B:** field life at 25,000 bopd. Recoverable P90/P50/P10 = 132.6 / 139.5 / 146.8 MMbbl. Reruns are identical. Source: L-21 to L-33. DERIVED

3.3 Plateau against the vessel ceiling

Three numbers govern production and cannot be chosen independently: the resource, the rate the facility can take, and the resulting life.

Metric	P90	P50	P10	Basis
Recoverable oil	132.6 MMbbl	139.5 MMbbl	146.8 MMbbl	Monte Carlo, L-28 to L-30
Life at 25,000 bopd	14.5 yr	15.3 yr	16.1 yr	÷ (25,000 × 365), L-31 to L-33
Plateau duration	10.1 yr	10.7 yr	11.3 yr	70% of ultimate at plateau, ASSUMED

Table 3.1 — Production metrics at the as-built ceiling. No economic limit is applied — L-40 is OPEN; see §3.7.

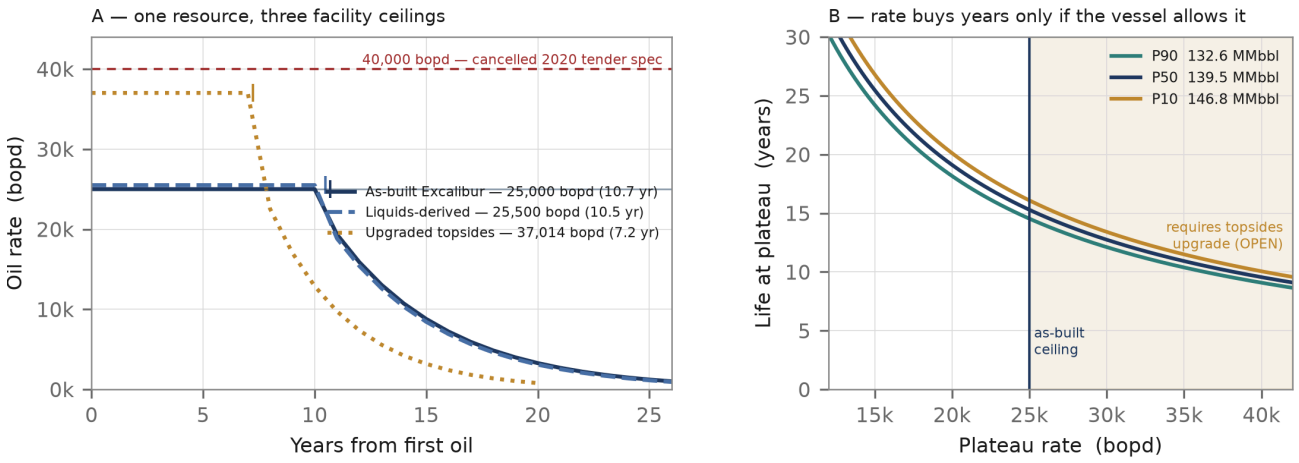


P50 resource 139.5 MMbbl (L-29). Plateau carries 70% of ultimate (ASSUMED); exponential decline exhausts the remainder.
No economic limit is applied — all curves are truncated at 2% of initial rate for plotting only (L-40 OPEN).

Figure 1 — **A:** one resource, three facility ceilings. The solid navy curve is the vessel as built; the dotted amber curve requires a topsides upgrade for which no public specification exists. The red line is the cancelled tender. **B:** life as a function of plateau rate, for P90/P50/P10. Sources: L-05, L-10, L-28 to L-33. DERIVED

Read panel A with the red line in mind. **No case reaches 40,000 bopd.** The as-built vessel sits at 62.5 per cent of the tender nameplate; the upgraded scenario — which no public document supports — reaches 92.5 per cent. The gap is not a range to be narrowed by more analysis. It is a capacity question only a yard specification can answer.

3.4 What the 9.6-year figure actually is

The previous revision carried a 9.6-year “stress case” and a “44 per cent decline requirement”. Both are now explained.

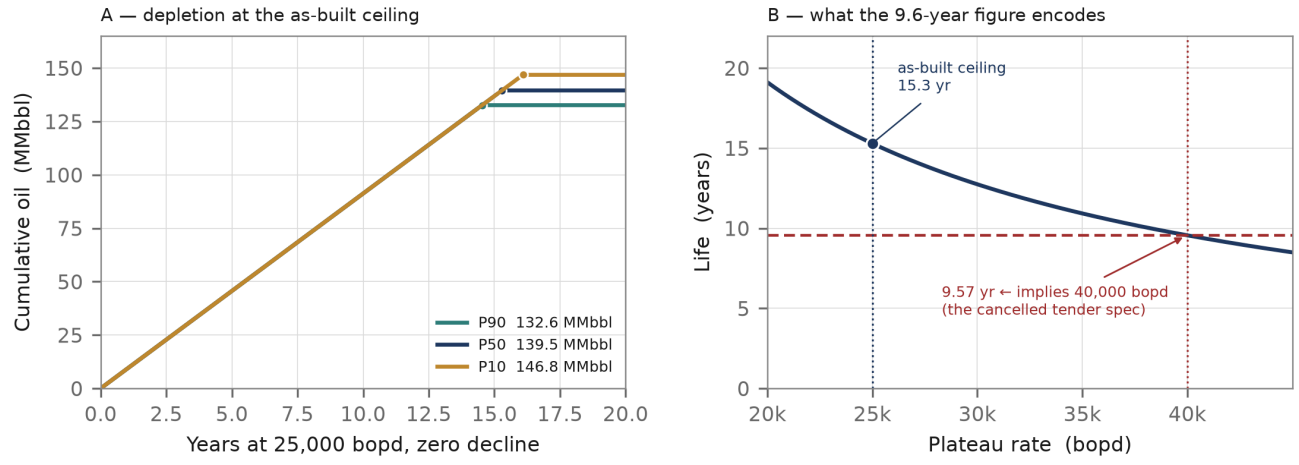

L-29 ÷ (40,000 × 365) = 9.57 yr. The figure v0.1 carried as a subsurface stress case is the cancelled 2020 tender's own 40,000 bopd, not a property of the reservoir or of any vessel. This supersedes conflict C-06.

Figure 2 — **A:** depletion at 25,000 bopd for P90/P50/P10. **B:** the same arithmetic plotted against rate. The 9.57-year line implies 40,000 bopd — the cancelled tender’s own number. Source: L-29, L-10. DERIVED

Arithmetic	Result
139.5 MMbbl ÷ (25,000 bopd × 365)	**15.3 years** — as-built vessel
139.5 MMbbl ÷ (37,014 bopd × 365)	**10.3 years** — upgraded scenario, ASSUMED
139.5 MMbbl ÷ (40,000 bopd × 365)	**9.57 years** — cancelled tender

The 9.6-year figure is therefore not a property of the reservoir. It is the tender’s 40,000 bopd arithmetic — the public resource divided by a capacity that was never built. It survived into the pack because 139 ÷ 40,000 resembles a decline study. **C-06 closes on that basis.** The “44 per cent” figure reproduces from nothing in this arithmetic and is withdrawn, not carried forward.

3.5 Gas — a ratio of totals is not a GOR

790.9 bcf of gas and 139 MMbbl of oil give 5,640 scf per barrel. That number was used in the previous revision to size a gas train and to reason about voidage. Both uses were circular.

Why it is not a GOR

A producing gas-oil ratio is gas released **from solution**, per barrel of oil produced. Limbayong is an oil accumulation **and** a non-associated gas field: Limbayong-1 found gas in 2002, Limbayong-2 found oil in 2013. Dividing total gas by total oil mixes free gas with solution gas and yields a number with no physical meaning.

What it is


A **ratio of totals** (L-37): total recoverable gas ÷ total recoverable oil. Useful as a portfolio-scale ratio. Useless for sizing a gas train, sizing voidage, or inferring solution gas. Only PVT data closes this, and no PVT is public.

The practical consequence: the “two-year gas tail” in the previous revision is withdrawn. If a material part of the 790.9 bcf is free gas, it need not follow the oil decline at all — it can be produced on its own schedule, or left in place. The pack does not know which, and says so.

OPEN — L-09 / C-08 — gas handling. Excalibur’s gas compression and export capacity is not published. The cancelled tender specified 90 MMscfd. This hull’s own figure does not exist in public. Until a specification appears, no gas rate in this pack is a capacity constraint — they are production assumptions resting on an unknown facility.

3.6 Voidage and VRR — the conclusion inverts

The previous revision concluded over-injection. Priced against the correct vessel and the correct definition, the direction reverses.

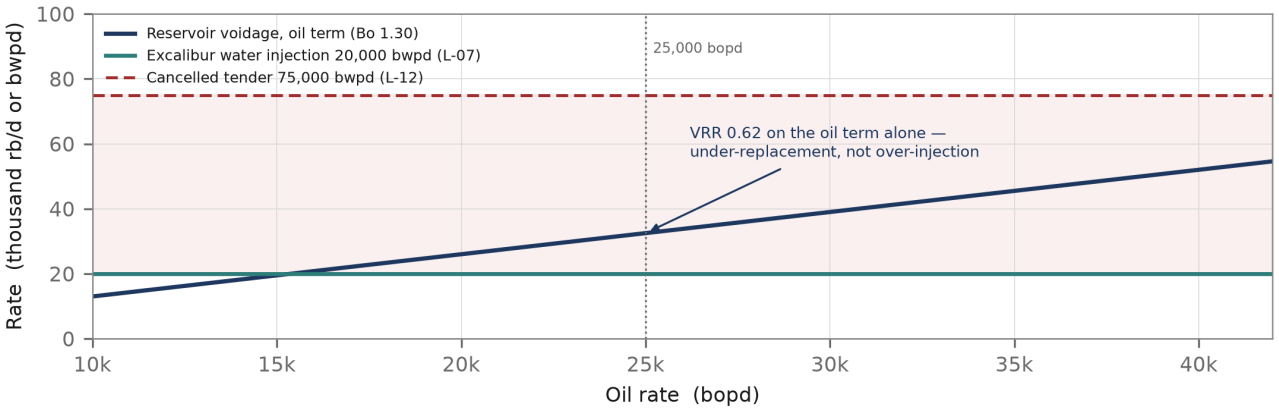

VRR = Σ(injected rb) ÷ Σ(produced rb), where the denominator includes oil × Bo, produced water × Bw AND free gas (GOR − Rs) × Bg.
Counted on the oil term alone the ratio is 0.62. Adding produced water and free gas can only lower it. Gas re-injection is not disclosed (L-09 OPEN).

Figure 4 — Oil-term voidage against injection capacity. At 25,000 bopd and Bo 1.30, voidage is 32,500 rb/d; Excalibur injects 20,000 bwpd. The 75,000 line is the cancelled tender. Source: L-07, L-12, L-34, L-35. DERIVED

VRR, counted properly	Value
Injection capacity (L-07)	20,000 bwpd
Oil-term voidage at 25,000 bopd, Bo 1.30 (L-35)	32,500 rb/d
VRR on the oil term alone (L-36)	**0.62**
Adding produced water and free gas to the denominator	**lower still**

Definition used: VRR = Σ injected reservoir barrels ÷ Σ produced reservoir barrels, where the denominator is oil × Bo **plus** produced water × Bw **plus** free gas × Bg. Counting only the oil term already gives 0.62; including the terms the definition requires can only reduce it. On the public record this vessel would **under-replace** voidage, not over-inject.

OPEN — Two things this does not prove. First, whether water injection is planned at all — the public record is silent. Second, whether gas is re-injected, which would change total voidage and is not disclosed (L-09). The 0.62 is an oil-term statement, and is labelled as one.

3.7 What Part 3 establishes and what it does not

Established

- The vessel as bought produces 25,000 bopd — 37.5 per cent below the 40,000 bopd on which the development case has been described.
- At that ceiling the P50 resource depletes in 15.3 years, range 14.5–16.1.
- The 9.6-year figure is tender arithmetic, not a subsurface result.
- On the oil term, VRR is 0.62 — under-replacement.
- The ratio of totals is not a GOR and cannot size anything.

Not established

- Post-conversion topsides (L-42) — no public disclosure exists.
- Whether ten wells can deliver even 25,000 bopd — no productivity data.
- Whether recovery is 35 or 40 per cent, or what the drive mechanism is.
- Whether water injection is planned; whether gas is sold, injected or flared.
- The economic limit (L-40, OPEN), and therefore true life and abandonment timing.

None of the second column is closable by better analysis. Each item needs a document that is not public: a yard specification, a well test, a PVT report, a gas sales agreement, or a PSC. Listing them as OPEN is the honest output of this Part, and more useful than a filled-in number.

3.8 What would move these numbers

Four inputs carry the whole of Part 3. Each is varied alone, holding the others at their stated value.

Change one input	From → to	P50 life	Reading
Plateau rate	25,000 → 30,000	15.3 → 12.7 yr	A fifth more rate costs a fifth of the life. Neither is better; they are different projects.
Plateau rate	25,000 → 37,014	15.3 → 10.3 yr	The upgraded case: buys 12,000 bopd, loses 5 years.
Recovery factor	35 → 40 %	14.3 → 16.3 yr	Inside the P90–P10 band; the largest technical unknown.
Volume factor	1.30 → 1.40	VRR 0.62 → 0.57	Worse, not better: higher Bo means more reservoir barrels to replace.
Recoverable	−20 % → +20 %	12.2 → 18.4 yr	The sensitivity the tight bracket in §3.1 conceals.

Table 3.2 — Single-input sensitivities on the P50 case, at 25,000 bopd unless stated. Not a tornado chart: the inputs are not independent and no probability is attached.

The last row is the one to read twice. A ±20 per cent move on recoverable volume swings field life by six years — far more than the P90–P10 band implies. That is the cost of a bracket built from one public number: the Monte Carlo is reproducible and internally consistent, and it is narrower than reality because its inputs were never independent measurements.

5 The Earth

The previous revision had no geology. This Part is the object the other Parts are about.

5.1 Why this section exists

A field development plan that contains production, facilities and economics but no geology is a plan for a factory with no ore body. The earlier revisions of this pack described Limbayong as a set of volumes and a vessel. That is the accountant's view of a mountain range.

This Part asks a different question: what does the ground actually do? Six things follow from the answer, and five of them change decisions taken elsewhere in the pack.

5.2 Plate framework

The northern margin of Borneo is the product of one long collision and one long escape.

South China Sea oceanic crust was subducting southward beneath Borneo from the Late Eocene. The sediment stripped off the downgoing plate built an accretionary prism — the Crocker complex, now exposed on land as folded turbidites. In the early Middle Miocene the attenuated continental crust of the Dangerous Grounds arrived at the trench and could not be subducted. It collided. The prism was uplifted and eroded, producing the regional surface that every well in this province penetrates: the Deep Regional Unconformity. Tan and Lamy (1990) describe this as the change from a trench-associated basin to a prograding shelf-slope system, and divide the margin into seven tectonostratigraphic provinces.

Figure 5.1 places Limbayong in that framework. The field is not on the shelf. It sits in the deepwater fold-and-thrust belt outboard of the shelf edge, in the province the same authors call the Outboard Belt, between the NW Sabah Trough and the prograding Baram-Champion delta system.

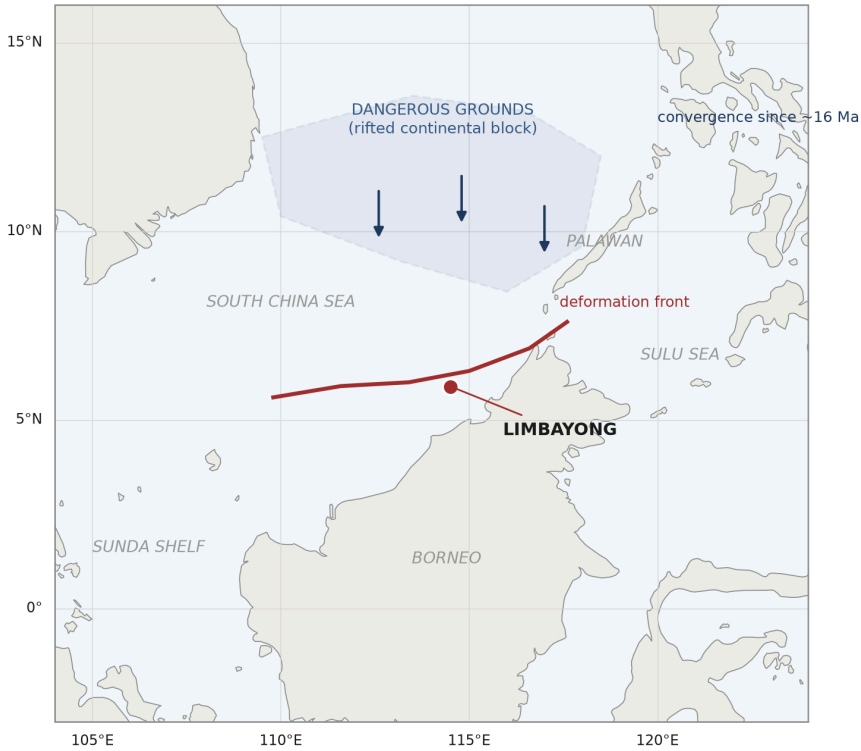



Plate framework after published NW Borneo syntheses (see Appendix E). Coastline: Natural Earth 1:50m. Dangerous Grounds outline and deformation front are schematic, drawn for orientation only — they are not surveyed boundaries. Limbayong position: GEM field coordinate, exact to 0.001°.

Figure 5.1 — Plate framework. South China Sea, the rifted Dangerous Grounds block, the Borneo margin and the deformation front. Limbayong sits in the deepwater belt outboard of the shelf, not on the platform. Coastline: Natural Earth 1:50m. Outlines are schematic; position is exact. Sources S-19, S-14. **DERIVED**

Two numbers matter for everything downstream. First, the belt is **young and still moving**: Tan and Lamy record a Late Pliocene deformation phase that produced gentle anticlines with numerous crestal faults across this very province. Second, the belt is **built of the same sediment the reservoirs are made of** — the folds are the delta, shortened. That is why the traps are long, narrow and faulted rather than broad and simple.

5.3 The belt, seen from the sea surface

The bathymetry is the cheapest seismic interpretation in the world: it is the structural grain expressed as topography.

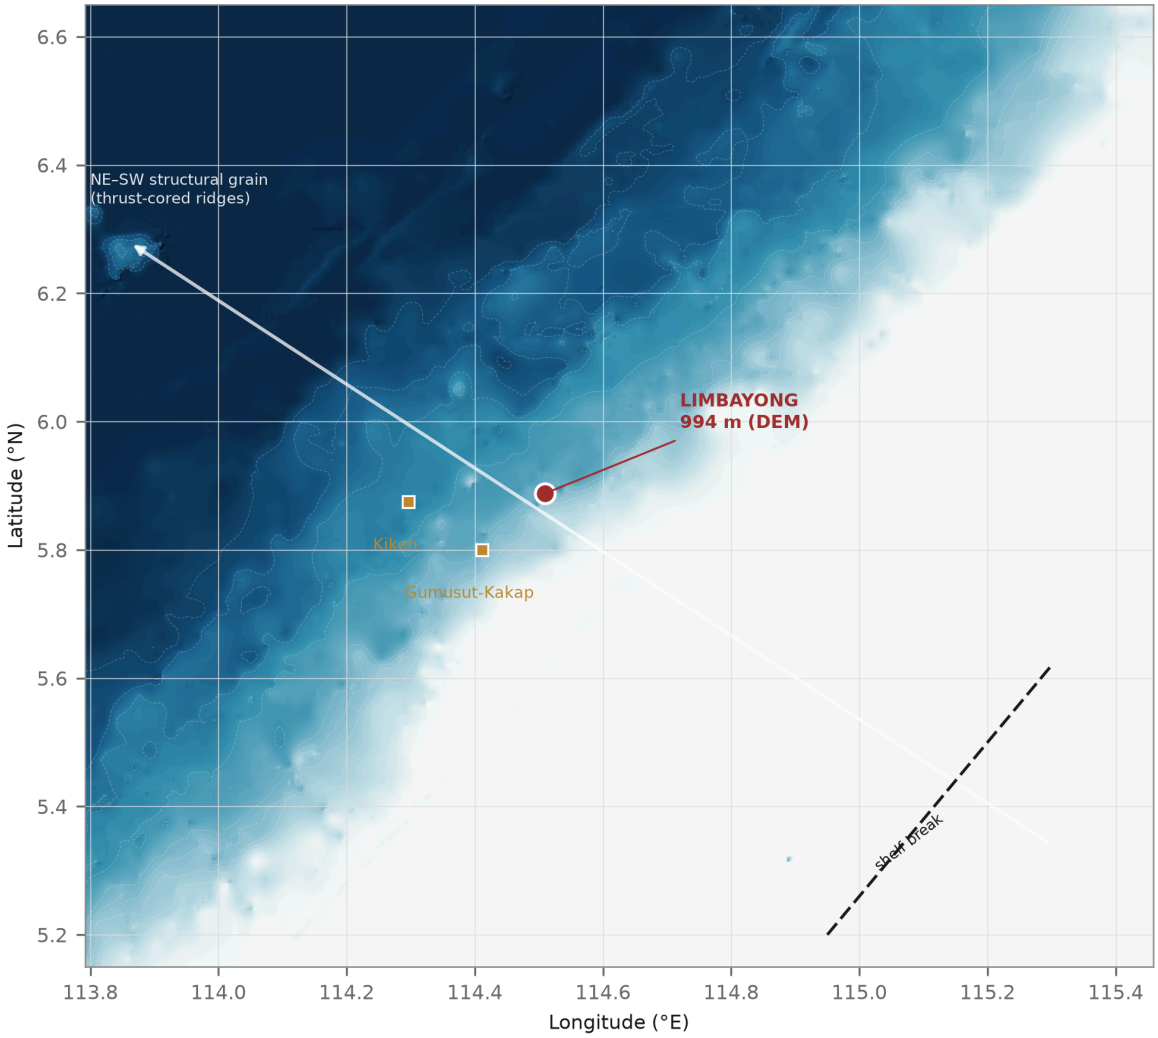


Shaded relief from NOAA/ETOPO global DEM, ~450 m cells, resampled for print. Depth at Limbayong read directly from the grid: 994 m — consistent with the 900–1,200 m reported depth (L-16). Field positions: GEM field coordinates; they may represent block centroids, not well locations. Ridges are real topography; their structural interpretation is from published seismic, not from this DEM.

Figure 5.2 — Real bathymetry and shaded relief, NW Sabah deepwater. The NE–SW grain is the fold-thrust belt; each ridge is a shortened anticline. Limbayong reads 994 m from the grid, consistent with the 900–1,200 m reported depth (L-16, L-43). Field coordinates from GEM. Relief: NOAA/ETOPO, 450 m cells. **DERIVED**

The DEM gives four measurements, each checkable:

Measurement	Value	How obtained
Water depth at the field	994 m	DEM cell at 5.888 N, 114.510 E — L-43
Seafloor slope at the field	3.2°	DEM gradient; 95th percentile 7.8° within 30 km — L-53
Shelf break along section A–A′	144 km from the shelf edge	−200 m crossing on the transect — L-54
Total relief, shelf to basin	about 2,800 m	Transect minimum and maximum — L-55

The first real finding from the Earth. Limbayong sits at 994 m, almost exactly the depth the operator reports, on ground that slopes at only 3.2°. That is gentle. It matters twice: a spread-moored or turret-moored unit can sit there without the mooring problem people expect in a fold belt; and the site is not on a steep ridge flank where mass transport deposits would dominate the shallow section. The hazard is not the slope at the field. It is the slope between the field and the shelf, and the faults beneath it.

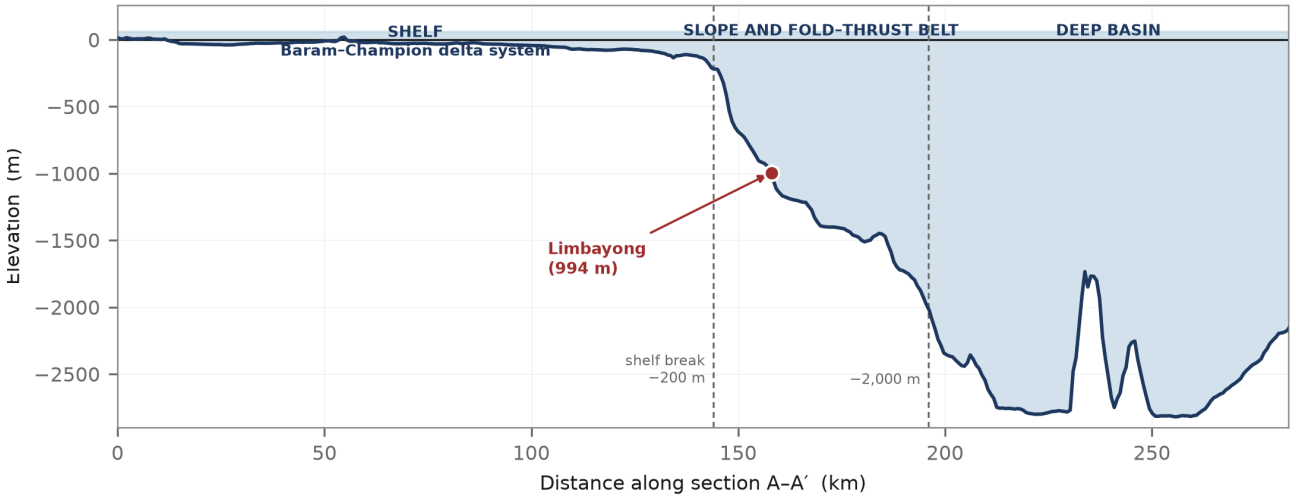


Section A–A′ traced on the real DEM from 115.55°E 4.95°N to 113.55°E 6.55°N, i.e. from the shelf, across the slope and fold belt, into the basin.
Vertical exaggeration ≈ 32× at this aspect. The 1,800 m of relief between the shelf break and the basin is real; the ridges between them are the folds the fields sit on.

Figure 5.3 — Real bathymetric section A–A′ across the margin, from the shelf, across the fold-thrust belt, into the basin. Limbayong projects onto the belt at 994 m. Vertical exaggeration ≈32×. Data: NOAA/ETOPO DEM (S-14). **DERIVED**

5.4 Stratigraphy and what the reservoir actually is

Tan and Lamy divide the margin into four stages, and the division still holds.

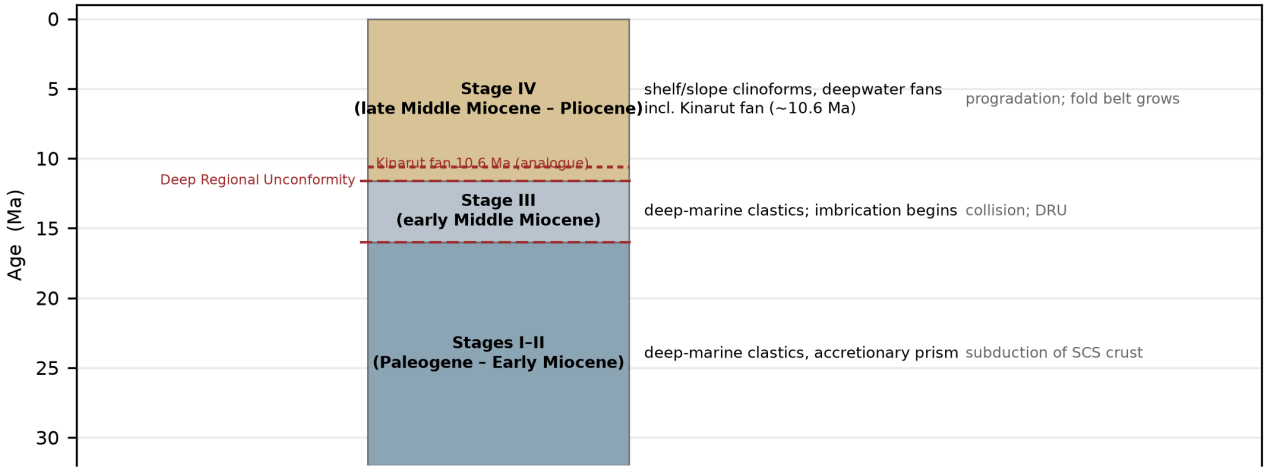

Schematic, after Tan & Lamy (1990, Bull. Geol. Soc. Malaysia 27) and Cullen et al. (2006, AAPG Search & Discovery #90052).
Stage boundaries are approximate; the column is drawn to show order and environment, not thickness. Reservoir interval at Limbayong is not public — the Kinarut fan is the regional analogue, not a stated


Figure 5.5 — Tectonostratigraphic column. Stages I–III are deep-marine clastics of the accretionary wedge, truncated by the Deep Regional Unconformity; Stage IV is the prograding shelf-slope system that hosts the deepwater fans. The Kinarut fan (10.6 Ma) is the regional analogue for the reservoir interval, not a stated Limbayong reservoir. After Tan & Lamy (1990) and Cullen et al. (2006). **DERIVED**

The reservoir is not a layer cake. The operator's own description is precise: **"vertical intercalation of thin-bed, thick sand reservoir"** (S-13). That phrase is worth unpacking, because it is the whole engineering problem in eight words.

Thin beds and thick beds interbedded means permeability varies by orders of magnitude over metres. Flow will not be homogeneous. Water or gas will find the thick beds first; the thin beds will hold oil that the pressure front reaches late or never. Recovery factor in such a system is not a property of the field — it is a property of the completion design, the well spacing and the pressure support, which is why the operator's paper talks about **"high-grading producer-injector pairing"** rather than about a field-wide number.

5.5 The trap, and why one field is really several

Limbayong is a **severe elongated structure: 30 km long, 2.5 km wide** (S-13). Aspect ratio 12:1. That is not a dome. It is a ridge, and ridges in thrust belts are cut by cross-faults.

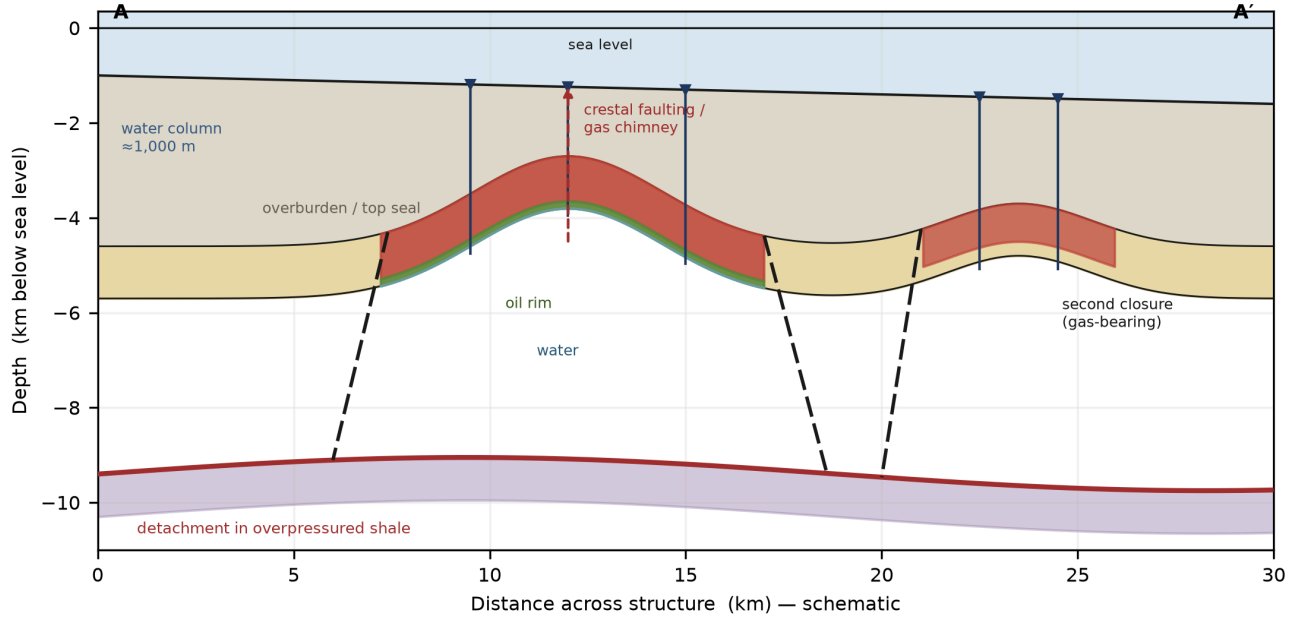

SCHEMATIC. Geometry after published descriptions of thrust-cored anticlines in the NW Borneo deepwater fold-thrust belt; it is not digitised from any seismic line, and no dimension is a measurement. The point of the figure is topology, not size: one structure, several fault-bounded compartments, a gas column over an oil rim, and a crest that leaks.

Figure 5.4 — Schematic cross-section: a thrust-cored anticline with a gas column over an oil rim, cut into compartments by thrust splays, detached on overpressured shale, with crestal faulting. Not from seismic, and not to scale — topology only. Geometry after published descriptions of the NW Borneo belt (S-13, S-19). ASSUMED

The operator does not leave this to inference. Their paper names the problem: the structure has **“varying faults frequency”** and **“lateral compartmentalization which impend effectiveness of well drainage and pressure maintenance”**. It also records that four appraisal wells since 2002 gave **“diverse subsurface understanding, indicated possible different depositional model and greater degree of complication.”**

> **This is the most important sentence in the pack, and it is the operator’s, not mine.** The company that owns the data says the field is compartmentalised in a way that defeats well drainage and pressure maintenance. Any development plan that assumes one connected tank — including a material-balance model, a single recovery factor, or a single plateau — is contradicted by the operator’s own published description.

Put a number on it. Ten development wells across 30 km is one well every 3 km. If the fault blocks are 2–5 km wide — the assumption in L-52, and it is an assumption — then several compartments receive no well at all, and the wells that exist cannot drain them. The field would produce from the compartments it happens to intersect, at a rate set by those compartments, and the rest of the 139 MMbbl would sit behind a fault. This is testable, cheaply: interference testing and tracers between wells, early. It is also the reason the well count is a bigger value lever than the vessel.

5.6 Charge, leakage, and the oil rim

The discovery history is a geological argument in three dates.

Date	Event	What it implies
early 2000s	Limbayong-1, gas	A gas accumulation was found first. Public estimates put it near 800 bcf (S-16).
17 Mar 2014	Limbayong-2 appraisal: 136 m of oil-bearing sand	The appraisal found an oil column beneath the gas. Shell 35%, ConocoPhillips 35%, PETRONAS Carigali 30% at the time (S-15).
2026	FID, 100% PCSB	The oil rim, not the gas, is what converted a stranded gas discovery into a development.

Why is there an oil rim under a gas field at all? The basin-modelling study for the adjacent Block R gives a mechanism that fits (S-20): in this system, traps with larger structural relief retain oil, while **gas leaks preferentially and progressively to shallower levels, leaving the oil behind**. The same paper reports that the leakage model is observed at Kikeh and Gumusut-Kakap, and that seabed pockmarks and mud volcanoes in the area indicate hydrocarbons reaching the surface today.

If that mechanism is operating at Limbayong, three consequences follow, and none of them is in the previous revisions:

1. **The gas column may be a leaking accumulation, not a sealed one.** 790.9 bcf is a static volumetric estimate. On a trap that vents, the producible gas is set by seal capacity and leakage rate, not by trap volume.
2. **The oil rim is the resource that stayed.** Which is consistent with it having been missed by the first well in 2002 and found by an appraisal eleven years later.
3. **The top seal is a dynamic boundary.** Crestal faults in a Late Pliocene deformation phase are the same faults a gas chimney would use. Seal integrity should be tested, not assumed, and any development that changes pressure in the gas cap changes the leakage driving force.

OPEN — Not established: whether seepage is active at Limbayong specifically. The pockmarks and mud volcanoes are documented in the adjacent Block R, on the same trend, not on the Limbayong structure. This is a hypothesis with a mechanism and an analogue, not a measurement. It is cheap to test: a seabed geochemical survey and a repeat bathymetric or AUV survey over the crest.

5.7 Geomechanics — the Earth pushing back on the drill bit

The operator has published the drilling problem, which is unusual and useful (S-17):

- the drilling margin is **less than 0.5 ppg** on some wells, even at the surface section;
- most deep wells must be drilled **highly deviated, in the direction of minimum horizontal stress**;
- the consequences named are stuck pipe, hole instability, differential sticking and skin damage;
- managed pressure drilling is required, with a multi-phase model for gas influx transport.

A 0.5 ppg window is not a drilling inconvenience. It is a cost and schedule driver, a well-count constraint, and a reason why the tenth well may cost more than the first. Any capital estimate built from day-rate times days, without an MPD spread and a geomechanical contingency, is optimistic at the source. This is also the part of the Earth that most directly supports the decision to drill fewer, better-placed wells rather than many.

5.8 What the Earth changes

Five findings. Each one moves a decision that lives in another Part.

ID	Finding from the ground	Consequence for the FDP
E-1	A 30 × 2.5 km thrust ridge, cut by faults of varying frequency, with lateral compartmentalisation that the operator says defeats drainage and pressure maintenance (S-13).	The single-tank model is invalid. Recovery factor and plateau are outputs of well placement, not inputs. Part 3's 139.5 MMbbl P50 should be read as a resource in place in several tanks, not one.
E-2	Ten wells over 30 km is one well every 3 km; inferred compartment width 2–5 km (L-52).	Well count, not vessel capacity, is the first value lever. Add interference and tracer tests before the development drilling campaign, or accept that some compartments are never drained.
E-3	Gas is the leaking phase in this system; pockmarks and mud volcanoes in the adjacent block show active seepage; Limbayong-1 found gas, an appraisal found 136 m of oil (S-15, S-20).	790.9 bcf is a static trap-fill number on a possibly leaking trap. The oil rim is the bankable resource. Test seal and seepage before committing gas export capacity.
E-4	Drilling margin under 0.5 ppg on some wells; MPD required; trajectories along minimum horizontal stress (S-17).	Well cost carries a geomechanical premium. A cost estimate without MPD and contingency is optimistic. Fewer wells also means less cumulative geomechanical risk.
E-5	About 800 MMboe scattered across deepwater Sabah, and the operator states an intent to be the deepwater hub for East Malaysia (S-13, S-17).	The value case for Limbayong is not the 139 MMbbl. It is the hub. That is a different economic question from the one the public narrative poses — and a stronger one.

Table 5.1 — Earth findings and their consequences. E-1 to E-4 are sourced; E-5 is strategic and sourced to operator statements.

Read E-1 and E-5 together. The field is small and compartmentalised. That is a poor standalone investment and an excellent infrastructure anchor for 800 MMboe of neighbours. The previous revisions argued about the vessel; the ground says the argument should be about phasing and hub economics. That is the new light this Part contributes.

5.9 What the ground still withholds

Established from the Earth

- Regional framework, stratigraphic stage and tectonic timing, with sources.
- Water depth measured independently: 994 m.
- Structure dimensions and complexity from the operator's own paper.
- Four appraisal wells; 136 m of oil sand in Limbayong-2.

Not established

- Reservoir age, net-to-gross, porosity and permeability at Limbayong.
- Fault block size, throw, and seal capacity — L-52 is an assumption.
- Whether the trap leaks today, and at what rate.
- Depth to detachment and the amount of shortening.

- A published geomechanical constraint: under 0.5 ppg, MPD required.
- A mechanism for the gas-oil distribution, with analogues.

- Pore pressure and fracture gradient at Limbayong specifically.
- Whether the structure is filled to spill or to a leak point.

Every item in the second column is available to the operator and to no one else. That is the honest boundary of a public-source shadow FDP: the Earth is visible from outside, but only its surface. The seismic that would settle all six is not public, and should not be.

5.10 Geological risk register

ID	Risk	Evidence	Impact	Cheapest test
G-1	Compartments not drained by ten wells	Operator reports lateral compartmentalisation defeating drainage; 3 km spacing	Recovery factor falls; plateau shortens; pressure maintenance fails	Interference test and tracers between first two wells
G-2	Top seal leaks at crest	Crestal faults from Late Pliocene deformation; active seepage nearby	Gas column smaller than volumetric estimate; 790.9 bcf overstated	Seabed geochemical survey and AUV bathymetry over the crest
G-3	Reservoir quality poorer than analogue	Thin-bed/thick-sand intercalation; no public porosity or permeability	Lower productivity index; more wells needed	Core and DST on the first development well
G-4	Drilling margin tighter than planned	Under 0.5 ppg reported; MPD required	Well cost and schedule overrun; stuck pipe	Pre-drill pore pressure from the next appraisal opportunity
G-5	Shallow geohazard at the FPSO site	Fold belt with mass transport deposits; slope 3.2° locally	Mooring or top-hole problem	High-resolution site survey before mooring design
G-6 (note)	Structure not filled to spill	No public contact or spill-point data	Volumes below P90	Pressure data across contacts from appraisal wells

Table 5.2 — Six geological risks, each with a test that costs less than the decision it informs. G-6 is the one that cannot be closed from public data.

5.11 In one page

Limbayong is not a dome with a vessel attached. It is a **30 km ridge** in an active fold-thrust belt, made of the same delta sediment that was shortened to form it, cut by faults whose spacing the operator describes as variable and whose effect the operator describes as defeating drainage.

The reservoir is thin beds and thick beds interbedded — heterogeneous at the scale of metres, not kilometres. That is why recovery is a design question and not a number.

The gas is the phase that leaks in this basin. The oil stayed. An appraisal well found 136 m of oil sand eleven years after the discovery well found gas, which is exactly what a leaking gas accumulation with an oil rim looks like.

The drilling margin is under half a pound per gallon on some wells. Every well is expensive and every well carries risk. Ten wells over 30 km is three kilometres apart — which may be too far if the compartments are two to five kilometres wide.

And the field is small: 139 MMbbl. What makes it worth building is not the 139. It is the 800 MMboe of neighbours and the operator's stated intention to be the deepwater hub for East Malaysia. **That is the investment case, and it is a different case from the one being told in public.**

Appendix B — Assumptions ledger

55 rows. Independence = number of independent owners of the evidence; the same owner counts once, however many pages it publishes.

Reproducibility

```
L-22 = (347 + 398) / 2 = 372.5                    L-31 = 139.5e6 / (25000 × 365) = 15.29
L-25 = (0.35 + 0.40) / 2 = 0.375                  L-32 = 132.6e6 / (25000 × 365) = 14.53
L-35 = 25000 × 1.30 = 32 500 rb/d                 L-33 = 146.8e6 / (25000 × 365) = 16.09
L-36 = 20 000 / 32 500 = 0.615                    9.57 = 139.5e6 / (40000 × 365)
L-37 = 790.9e3 / 139.5 = 5 670 scf/bbl            seed = 20261019, N = 20 000
```

Row	Parameter	Value	Unit	Class	Ind.	Basis / formula
L-01	Vessel identity	IMO 9417103	—	VERIFIED	2	IMO in Bursa filing; name history in press
L-02	Year built	2007	year	VERIFIED	2	Bursa filing; commissioned 2008 per press
L-03	Storage — design	300,000	bbl	VERIFIED	1	Bursa filing, primary document
L-04	Storage — working	270,000	bbl	REPORTED	1	Owner factsheet via trade press
L-05	Oil capacity — as-built	25,000	bopd	VERIFIED	2	Trade press 2022; vessel page
L-06	Total liquids	30,000	bpd	REPORTED	1	Owner factsheet
L-07	Water injection	20,000	bwpd	REPORTED	1	Owner factsheet; corroborated
L-08	Produced water	25,000	bwpd	REPORTED	1	Owner factsheet
L-09	Gas handling	not published	—	OPEN	0	No public figure for this hull
L-10	Tender oil	40,000	bopd	VERIFIED	2	World Energy Reports via press
L-11	Tender gas	90	MMscfd	VERIFIED	1	World Energy Reports via press
L-12	Tender water injection	75,000	bwpd	VERIFIED	1	World Energy Reports via press
L-13	Tender storage	600,000	bbl	VERIFIED	1	World Energy Reports via press
L-14	Oil recoverable, public	139	MMbbl	REPORTED	1	Resource tracker; P50 calibration only
L-15	Gas recoverable, public	790.9	bcf	REPORTED	1	Resource tracker
L-16	Water depth	900–1200	m	VERIFIED	2	Project description; 2026 press
L-17	Distance offshore	120	km	VERIFIED	2	Project description
L-18	Field type	oil + NAG	—	VERIFIED	2	Project description; discovery reporting
L-19	Working interest	100	% PCSB	VERIFIED	1	Trade press 2021
L-20	FID date	2026-08-28	date	REPORTED	1	Trade press
L-21	OOIP bracket low	347	MMbbl	ASSUMED	0	Brief; back-calculated at 40% RF
L-22	OOIP bracket mode	372.5	MMbbl	DERIVED	0	(L-21 + L-23) / 2
L-23	OOIP bracket high	398	MMbbl	ASSUMED	0	Brief; back-calculated at 35% RF
L-24	Recovery factor low	0.35	frac	ASSUMED	0	Brief
L-25	Recovery factor mode	0.375	frac	DERIVED	0	(L-24 + L-26) / 2
L-26	Recovery factor high	0.40	frac	ASSUMED	0	Brief
L-27	OOIP–RF correlation	+0.60	rho	ASSUMED	0	HERMES: better rock raises both
L-28	Recoverable P90	132.6	MMbbl	DERIVED	0	Monte Carlo, L-21..L-27
L-29	Recoverable P50	139.5	MMbbl	DERIVED	0	Monte Carlo; reconciles to L-14
L-30	Recoverable P10	146.8	MMbbl	DERIVED	0	Monte Carlo
L-31	Life at 25,000 — P50	15.3	yr	DERIVED	0	L-29 ÷ (25,000 × 365)
L-32	Life at 25,000 — P90	14.5	yr	DERIVED	0	L-28 ÷ (25,000 × 365)
L-33	Life at 25,000 — P10	16.1	yr	DERIVED	0	L-30 ÷ (25,000 × 365)
L-34	Formation volume factor	1.30	rb/stb	ASSUMED	0	Deepwater analogue; no PVT
L-35	Oil-term voidage	32,500	rb/d	DERIVED	0	25,000 × L-34
L-36	VRR, oil term only	0.62	ratio	DERIVED	0	L-07 ÷ L-35
L-37	Gas:oil ratio of totals	5,640	scf/bbl	DERIVED	0	L-15 × 10³ ÷ L-14 — not a GOR
L-38	Subsea award 2021	250–500	US$M	VERIFIED	2	TechnipFMC “substantial” band
L-39	Subsea award 2026	75–250	US$M	REPORTED	1	TechnipFMC “significant”, press
L-40	Economic limit	not stated	—	OPEN	0	Needs price deck, opex, fiscal terms
L-41	Fiscal terms	not public	—	OPEN	0	PSC text unavailable
L-42	Post-conversion topsides	not published	—	OPEN	0	No MISC/MMHE disclosure
L-43	Water depth, measured	994	m	DERIVED	1	Read from NOAA/ETOPO DEM at the field coordinate
L-44	Structure length	30	km	VERIFIED	1	Operator paper, IPA complexity description
L-45	Structure width	2.5	km	VERIFIED	1	Operator paper
L-46	Appraisal wells since 2002	4	wells	VERIFIED	1	Operator paper
L-47	Net oil sand, Limbayong-2	136	m	VERIFIED	2	2014 discovery report, two outlets
L-48	Water depth, reported	1000	m	VERIFIED	1	2014 discovery report, Block J
L-49	Drilling margin, some wells	under 0.5	ppg	VERIFIED	1	Operator drilling paper
L-50	Kinarut fan age, analogue	10.6	Ma	VERIFIED	1	Cullen et al., AAPG S&D 90052
L-51	Scattered deepwater resource	800	MMboe	VERIFIED	1	Operator paper, Sabah deepwater
L-52	Compartment width, inferred	2–5	km	ASSUMED	0	Fault spacing in a 30 km belt; unmeasured
L-53	Seafloor slope at field	3.2	deg	DERIVED	1	DEM gradient; 95th pct 7.8 deg in 30 km
L-54	Shelf break on A–A’	144	km	DERIVED	1	−200 m crossing on the DEM transect
L-55	Seafloor relief within 30 km	1600	m	DERIVED	1	DEM window minimum and maximum

Table B.1 — Assumptions ledger. Every number in Parts 1 and 3 resolves here. Rows with independence 0 are assumptions or open items by construction.

Appendix E — Source register

ID	Source, and what it establishes	Ind.
S-01	Dagang NeXchange Berhad, Bursa Malaysia announcement, 20 Aug 2026 — disposal of FPSO **Excalibur** to MISC. IMO 9417103, year built 2007, design capacity 300,000 bbl, dimensions, US$35.0M price, delivery at MMHE Pasir Gudang. **Primary document.**	1
S-02	Offshore Magazine, "DNeX renames Avalon FPSO Excalibur", 4 Aug 2022. Name history from Sevan Hummingbird; commissioned 2008; 25,000 bbl/d; 270,000 bbl; 47 POB.	1
S-03	Teekay factsheet for **Hummingbird Spirit**, Sevan 300. 25,000 bopd, 30,000 bpd liquids, 25,000 bwpd produced water, 20,000 bwpd injection.	1
S-04	Offshore Technology, "Limbayong Deep-water Development Project", 15 Jun 2021. Water depth 900–1,200 m, 120 km offshore Sabah, Block G, oil and non-associated gas.	1
S-05	Sevan Deepwater Technology vessel page for **Excalibur**. 270,000 bbl, 25,000 bopd, 7 riser slots.	1
S-06	OE Digital, 23 Feb 2021, quoting World Energy Reports. Tender spec 40,000 b/d oil, 90 mmcf/d gas, 75,000 b/d water, 600,000 bbl; "substantial" contract US$250–500M; 10 wells; 100% PETRONAS interest.	1
S-07	Global Energy Monitor, Global Oil & Gas Extraction Tracker — Limbayong, data year 2023. 139 MMbbl liquids, 790.9 bcf, coordinates.	1
S-08	Splash247, 16 Sep 2026 — iEPCI award, "significant" (US$75–250M), 120 km offshore, 900–1,200 m.	1
S-09	The Star and Borneo Post, 17–18 Mar 2014 — Limbayong-2 oil discovery; establishes the oil leg of an otherwise gas discovery.	1
S-10	Trade press, 28 Aug 2026 — final investment decision taken. Partly paywalled.	1
S-11	TechnipFMC investor release, 2021 — Limbayong subsea award; contract-value convention only.	1
S-12	Natural Earth 1:10m coastline, public domain — map base for Figure 0.	1
S-13	Mohamed Aiman Mohamed Najib et al., **Limbayong: Decoding Industry Top Decile Reservoir Complexity for Marginal Deepwater Development**, SPE 210079-MS, 2022. Structure 30 km × 2.5 km, fault frequency, lateral compartmentalisation, four appraisal wells since 2002, low-case pivot, upgrade provision, 800 MMboe scattered resource.	1
S-14	NOAA / ETOPO global digital elevation model, ImageServer extract, NW Sabah, 450 m cells. Bathymetry, slope, transect.	1
S-15	Offshore Energy, 17 Mar 2014 — Limbayong-2 appraisal, 136 m oil-bearing sands, Block J, 1,000 m water, Shell 35% / ConocoPhillips 35% / PETRONAS Carigali 30%.	1
S-16	Upstream via WOG News, 17 Mar 2014 — appraisal at the Limbayong gas field; 800 bcf gas.	1
S-17	Limbayong Deepwater Development Well Planning — A Collaboration with Geomechanics with MPD Approach, SPE 210549-MS, 2022. Margin under 0.5 ppg; MPD required; trajectories along minimum horizontal stress; first PCSB-operated deepwater asset.	1
S-18	Cullen et al., **The Kinarut Sequence: A Model for Fan Deposition at the 10.6 Ma Sequence Boundary in NW Borneo Fold-Thrust Belt**, AAPG Search & Discovery 90052, 2006.	1
S-19	Tan, D.N.K. and Lamy, J.M., **Tectonic evolution of the NW Sabah continental margin since the Late Eocene**, Bulletin of the Geological Society of Malaysia 27, 1990. Stages I–IV, Deep Regional Unconformity, seven tectonostratigraphic provinces, Late Pliocene crestal faulting.	1
S-20	Basin Modeling Study of Deepwater Block R (DWR) Offshore Sabah and Its Correlation with Surface Geochemical Analyses, IPTC-18186-MS, 2014. Gas leakage model; oil-rich deeper, gas-rich shallower; pockmarks and mud volcanoes; observed at Kikeh and Gumusut-Kakap.	1

Table E.1 — Source register. Twenty public sources. None is a primary operator document for volumes, costs or fiscal terms; that absence is the central limitation of the pack.

Source limitations

Two sources carry the vessel, one owner chain. S-02 and S-03 describe the same hull and, on topsides, descend from the same owner. They are counted as one. S-01 is independent and confirms identity and dimensions but states no production rate. The 25,000 bopd figure is marked VERIFIED only because trade press and the hull owner agree; a sceptical reader should treat it as REPORTED.

The Limbayong link to this vessel is single-sourced. It rests on trade reporting that MISC acquired Excalibur for Limbayong. Neither MISC nor PETRONAS has confirmed it. One low-quality outlet describes the vessel as being dismantled; that conflicts with the Bursa filing's stated delivery to MMHE for conversion, and is logged as noise rather than adopted or suppressed.

No cost, schedule or fiscal data is primary. Award bands are contract-value conventions, not cost estimates. Nothing in this register supports a capital number.

Appendix F — Build status

Three content Parts of twelve complete, plus front matter. Published as a working draft so the honest denominator is visible.

Part	Content	State	Blocked by
0	Cover, control, decision frame	**DONE**	—
1	Basis and reconciliation	**DONE**	—
2	Executive summary	—	Must come last; consumes Parts 3–11
3	Production	**DONE**	L-42, for any post-upgrade case
4	Facilities and vessel	—	L-42 post-conversion specification
5	The Earth — geology, trap, charge	**DONE**	Reservoir properties and fault-block size remain non-public
6	Wells and drilling	—	No public well design or cost
7	Subsea and SURF	—	Award bands only; scope not public
8	Cost and schedule	—	AACE-class estimate needs contractor input
9	Economics	—	L-41 fiscal terms; single engine not yet built
10	Risk and assurance	—	Depends on 4–9
11	HSE, environment, decommissioning	—	No public EMS or decommissioning plan
12	Decision and recommendations	—	Depends on 2–11

Table F.1 — Part skeleton. Parts 1 and 3 complete; Part 0 is front matter, not a content Part. No Part is claimed that does not exist.

System findings carried forward

The audit scored the agent stack around 3/10 for FDP work and named the causes: no shared number store, verification performed by the author, no fiscal or probabilistic engine. Two are now addressed — this pack is generated from a single ledger, and Part 3 is a reproducible Monte Carlo rather than three hand-picked points. The remainder are code problems, not document problems:

- Three fiscal engines producing three answers from one input set. None retained.
- Verification performed by the same model family that wrote the work. Structurally biased.
- Roughly 200 tools exposed; selection accuracy degrades well before that.

Next build sequence

Ordered by value per unit of effort, and by dependency. Nothing later can be trusted before the item above it exists.

No.	Step	Why it comes here
1	Obtain the post-conversion specification	It changes every rate, volume and cost downstream. Nothing in Parts 4–9 can be written before it lands.
2	Build the single fiscal engine, with regression tests	Three engines produced three answers. One engine, hand-checked against a spreadsheet, replaces all three.
3	Independent verifier on a different model family	The author cannot check the author. This is the only control that catches a wrong-but-plausible number.
4	Parts 4–7: facilities, subsurface, wells, subsea	Each needs one primary document that is currently missing. They are parallel once step 1 lands.
5	Part 8 cost and schedule, then Part 9 economics	Both consume steps 1 and 2; neither can precede them.
6	Part 2 executive summary, then Part 12 decision	Last by construction. Summaries written first become wishes.

Appendix G — Figure QA gate

Every figure is checked by code, not by eye. Each text artist's bounding box is tested against the canvas and against every other text box; overlaps above a threshold fail the build. The gate runs on the same pass that draws the figures, so a figure cannot ship unchecked.

Figure	Text items	Outside canvas	Overlaps	Note
Fig 0 — location	20	0	0	Graticule, scale bar, north arrow, CRS note
Fig 1 — profiles	29	0	0	Three ceilings against one resource
Fig 2 — 9.6 yr	29	0	0	Arithmetic exposed on the figure
Fig 3 — Monte Carlo	25	0	0	P90/P50/P10 marked
Fig 4 — VRR	16	0	0	Injection capacity against voidage
Fig 5.1 — tectonics	9	0	0	Plate framework; schematic outlines disclosed
Fig 5.2 — bathymetry	5	0	0	Real DEM; depth measured at 994 m
Fig 5.3 — section	6	0	0	Real DEM transect; 32× exaggeration stated
Fig 5.4 — structure	10	0	0	Schematic; labelled as such
Fig 5.5 — stratigraphy	11	0	0	After Tan & Lamy 1990; Cullen 2006

Table G.1 — Gate output for this build. Ten figures, 160 text items, zero overflow, zero overlap. Reproducible by rerunning the figure scripts.

What the gate does not check

It measures geometry, not truth. A figure can pass and still be wrong — a scale bar can be miscomputed, an axis mislabelled, a curve can encode a bad assumption. The gate removes one class of defect (things that collide or fall off the page) and must not be read as assurance on the other class. That class needs an independent verifier, which is a separate build.

Prepared by HERMES (arifOS), 19 October 2026. Working draft, Parts 1, 3 and 5 of twelve. Independent reconstruction from public sources. Not a PCSB or PETRONAS document. No PETRONAS logo, branding or document numbering is used or implied. Not attributed to any individual.